




UL 3289 / CSA CL 1503 150°C 600V RADOX connecting leads

GENERAL PROPERTIES:

Excellent high temperature, low temperature, ozone and weathering resistance, flame retardant, easy to strip and process, heat pressure and highly abrasion resistant, soldering iron resistant, flexible.

APPLICATION:

For protected and fixed installation inside electrical equipment, especially suitable for the connection of motor windings, switchboards, magnets and transformers.

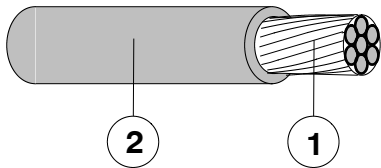

1. Conductor : Stranded tin plated copper, flexible
2. Coverage : Tape (≥ 6AWG only)
3. Insulation : RADOX 155
extruded irradiation crosslinked polyolefin
various
Colours :

Printing:

26 and 24 AWG

AWM Style 3289 150 °C 600V HUBER + SUHNER [prod.-place] RADOX [cross section]

22 AWG and larger

AWM Style 3289 150 °C 600V HUBER + SUHNER [prod.-place] RADOX CSA CL 1503 [cross section]

Technical data:

Voltage rating	600 V
Test voltage	2 500 V
Temperature rating (UL/CSA)	+ 150 °C
Minimum temperature flexing	- 40 °C
 fixed	- 55 °C
Min. bending radius for fixed installation	see Table 1

Approvals:

UL
CSA

File E63322
File 039507

Copyright 2016 HUBER+SUHNER AG. This document may not be amended and its content is confidential. It may not be passed on to third party which are not bound by confidentiality.

The product fulfils the test and specification requirements described in this document for the stated areas of application and operating conditions. HUBER+SUHNER AG does not expressly or implicitly guarantee performance under additional or changed conditions. Deviations are to be agreed upon in writing.

HUBER+SUHNER AG
Low Frequency Division

CH-8330 Pfäffikon



+41 (0)44 952 22 11



+41 (0)44 952 26 40

www.hubersuhner.com



UL 3289 / CSA CL 1503 150°C 600V RADOX connecting leads

TABLE 1: Dimensions, weight

Cross Section: UL 758 CSA C22.2 No.210		Cross-section: EN 60228/ IEC 60228	Conductor construction	Conductor diameter	Core diameter D.	Weight	Bending radius	Conductor resistance at 20°C
AWG	nom. mm ²	nom. mm ²	nom. n x mm d	max. mm	mm	nom. kg / 100m	min. mm	max. Ω / km
26	0.128		19 x 0.10	0.50	2.13 ± 0.10	0.55	3 x D	133
24	0.205		19 x 0.13	0.61	2.27 ± 0.10	0.66	3 x D	86.0
22	0.324		19 x 0.16	0.77	2.40 ± 0.10	0.79	3 x D	53.1
20	0.519		19 x 0.20	0.99	2.61 ± 0.10	1.1	3 x D	32.4
18	0.823		19 x 0.25	1.23	2.85 ± 0.10	1.5	3 x D	20.4
(16)		1.5	19 x 0.31	1.52	3.20 ± 0.10	2.1	3 x D	13.0
14	2.08		19 x 0.37	1.86	3.50 ± 0.10	2.7	3 x D	9.32
12	3.31		37 x 0.35	2.35	4.00 ± 0.15	4.0	3 x D	5.88
10	5.26		37 x 0.44	3.02	4.68 ± 0.15	6.1	3 x D	3.62
(8)		10	80 x 0.4	3.82	6.40 ± 0.15	11.1	3 x D	1.95
(6)		16	119 x 0.4	5.4	8.90 ± 0.2	17.8	3 x D	1.24
(4)		25	189 x 0.4	6.65	10.2 ± 0.2	26.0	3 x D	0.795
(2)		35	266 x 0.4	7.8	11.4 ± 0.2	35.2	3 x D	0.565
(1)		50	378 x 0.4	9.3	14.0 ± 0.25	51.9	3 x D	0.393
(2/0)		70	348 x 0.49	11.5	16.1 ± 0.3	71	3 x D	0.273
(3/0)		95	456 x 0.49	13.0	17.6 ± 0.3	90.6	3 x D	0.207
(4/0)		120	570 x 0.50	14.7	19.3 ± 0.3	113	3 x D	0.164

HUBER