


COAXIAL CONNECTOR, TNC, 50 Ohm, Straight cable jack (female)

21_TNC-50-3-32/133_N

Properties

- Threaded coupling mechanism improves control over the interface dimensions
- Used under a higher environmental load than BNC
- Available for 50 ohm and 75 ohm applications
- Applicable in frequencies up to 11 GHz

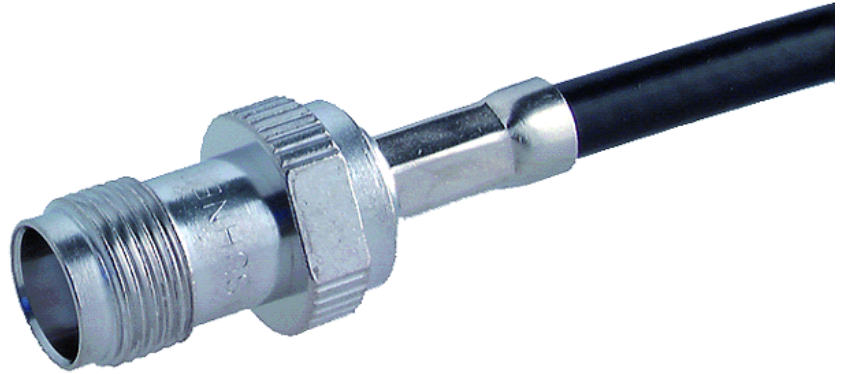

Product configuration		
Interface type	Gender	Standard
TNC	jack	IEC 60169-17_MIL-STD-348A/313_CECC 22200

Interface and material data		
Piece parts	Material	Plating
Centre contact	Copper Beryllium Alloy	Gold Plating (Nickel underplated)
Outer conductor	Brass	SUCOPLATE (R) Plating
Body	Brass	SUCOPLATE (R) Plating
Insulator	PFA / PTFE	
Crimp ferrule	Copper	SUCOPLATE (R) Plating

Electrical data	
Impedance	50 Ω
Interface frequency	11 GHz

Electrical Data (frequency related)		
Frequency range	Return loss	VSWR
0 GHz ... 2.5 GHz	32 dB	1.052

Mechanical data	
Weight	0.0139 kg
Mating cycles	500
Cable entry centre contact	crimped
Cable entry outer contact	crimped

COAXIAL CONNECTOR, TNC, 50 Ohm, Straight cable jack (female)

21_TNC-50-3-32/133_N

Environmental data		
Operation temperature	-65 °C ... 165°C	
Ordering Information Table		
Item number	Item description	Packaging type
84016601	21_TNC-50-3-32/133_NE	Single
Suitable cables		
Cable group	U9 - 3 mm / 50 Ohm	
Suitable cables	ENVIROFLEX_142	
	G_03232_D-01	
	RG_223_/U	
Additional cables	RADOX_RF_142	
Additional Information		
Only as assembly	No	

HUBER+SUHNER is certified by ISO 9001, ISO 14001, ISO 45001, IATF 16949, AS/EN 9100 and ISO/TS 22163-IRIS. Waiver: Facts and figures herein are for information only and do not represent any warranty of any kind.
DOCUMENT PIM-P2835 / Date of publication: 25.11.2023 / uncontrolled copy