
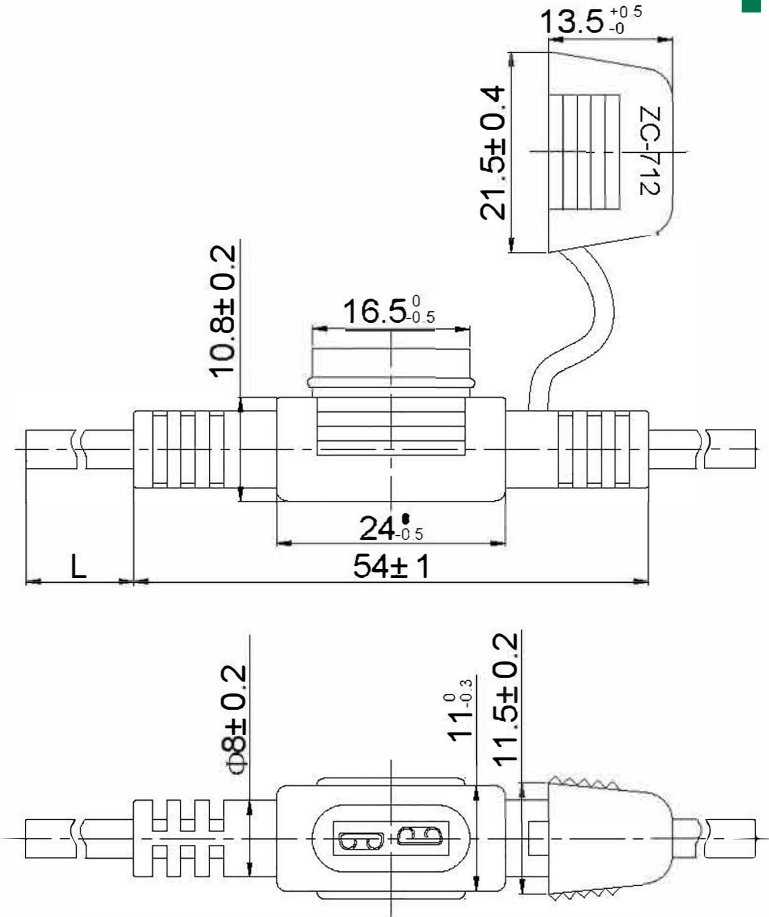


**Note:**

1. Wire UL1015, Red, L=135mm, and the length can be customized.
2. Fitting Fuse-link is MINI PLUG-IN FUSES.
3. Wire Spec must fit with the fuse, See Table 1

**Table 1**

| ITEM NO. | Conductor |          | Dia. | Amps Rating(MAX) |
|----------|-----------|----------|------|------------------|
|          | AWG       | Q'ty/mm  |      |                  |
| ZC-712A  | 12#       | 65/0.254 | 4.1  | 30A              |
| ZC-712B  | 14#       | 41/0.254 | 3.6  | 20A              |
| ZC-712C  | 16#       | 26/0.254 | 3.2  | 10A              |
| ZC-712D  | 18#       | 34/0.18  | 2.85 | 7.5A             |

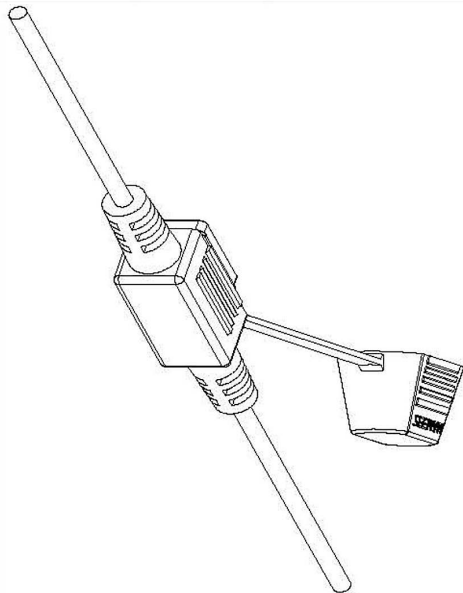

1. Body material-----Alcryn-black  
Cover material-----Alcryn-black
2. VOLTAGE RATING : 32 V DC
3. This product meets the ROHS standard
4. My company already got ISO/TS 16949 certificate

|       |                     |             |          |
|-------|---------------------|-------------|----------|
|       | TITLE               | DRAWN BY    | CHI      |
|       | In-Line Fuse Holder | CHECKED BY  | JU       |
|       | PART NO. ZC-712     | DESIGNED BY | JEAN     |
|       |                     | DATE        | 01/05/07 |
| SCALE |                     |             |          |
| P/N   |                     |             |          |
| REV   |                     |             |          |