


## Within Series Adaptor 46\_SMB-50-0-2/111\_N

### Description

T-adaptor, 3 jacks  
SMB jack (female) / SMB jack (female)

Interface standard  
Series SMB - IEC 60169-10\_MIL-STD-348A/311\_CECC 22130

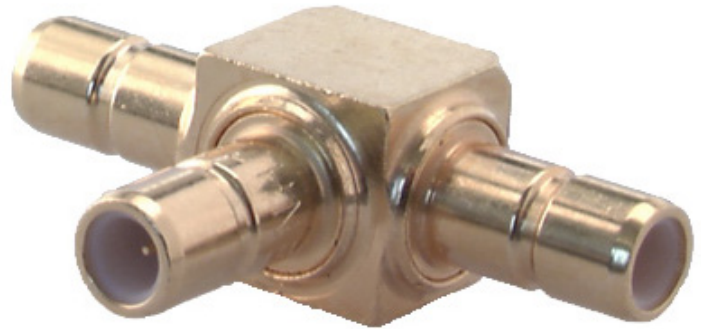

### Technical Data

#### Electrical Data

Impedance 50 Ω  
Interface frequency max. 4 GHz

#### Mechanical Data

Number of matings 500  
Weight 0.0029 kg

#### Environmental Data

Operating temperature -65 °C to 165 °C  
2011/65/EU (RoHS - including  
2015/863 and 2017/2102) not compliant

#### Material Data

Interface - SMB jack (female)

Piece Parts	Material	Surface Plating
Centre contact	Brass	Gold Plating (Nickel underplated)
Outer contact	Brass	Gold Plating (Nickel underplated)
Body	Brass	Gold Plating (Nickel underplated)
Insulator	PFA / PTFE	

Interface - SMB jack (female)

Piece Parts	Material	Surface Plating
Centre contact	Brass	Gold Plating (Nickel underplated)
Outer contact	Brass	Gold Plating (Nickel underplated)
Body	Brass	Gold Plating (Nickel underplated)
Insulator	PFA / PTFE	

### Related Documents

Catalogue drawing DCA-00013519

### Ordering Information

Single package 46\_SMB-50-0-2/111\_NE