

# Signal hooter HGK 3 + 4


**Comax**  
Signaltechnik

## General information

Loud-volume alarm with modest design and high degree of protection for outdoor installation. For uses in which ruggedness together with reliability have priority.

## Technical data

|                      |                                     |
|----------------------|-------------------------------------|
| Case                 | aluminium die casting, dark grey    |
| Cover                | ABS, shock-resistant, light grey    |
| System of protection | IP65 according to EN 60529          |
| Acoustic frequency   | approx. 850 Hz                      |
| Temperature range    | -20°C to +60°C                      |
| Duty cycle           | continuous operation                |
| Mounting direction   | opening downwards                   |
| Cable:               |                                     |
| -gland               | M20 x 1,5                           |
| -connection          | conductor up to 1,5 mm <sup>2</sup> |
| Weight               | approx. 1.75 kg                     |

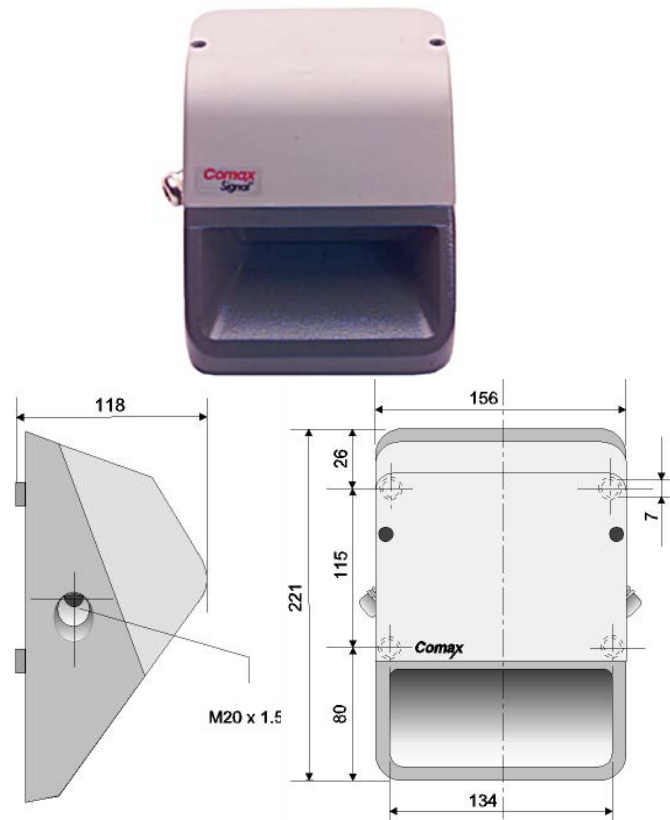

## Order data

| Item number | Rated voltage | Sound intensity level   | Current consumption |
|-------------|---------------|-------------------------|---------------------|
| HGK3.120.4  | 120 VAC 60Hz  | approx 105-110 dB(A),1m | 0.15 A              |
| HGK3.230.1  | 230 VAC       | approx 105-110 dB(A),1m | 0.10 A              |
| HGK4.024.2  | 24 VDC        | approx 105-110 dB(A),1m | 0.30 A              |

Subject to change without prior notice



**Comax**  
Signaltechnik

Comax Industrielle Signaltechnik AG, Thalstrasse 279, CH-4712 Laupersdorf/Schweiz  
Tel +41 32 617 31 41 E- mail@comax.ch Internet www.comax.ch

E\_HGK\_3\_4\_REV1\_12\_05\_2014