



LINEAR II

LED High Bay Light

PERFECT FOR AISLE LIGHTING

Combined with high performance, environmentally friendly and reliability, Linear II is the perfect LED High Bay Light for aisle lighting. With 150 lm/W efficiency, Linear II also has unique optical design which helps minimizing light waste. It can be equipped with intelligent control, such as DALI, motion sensor and Janus lighting system to maximize energy efficiency. The extrusion aluminum heat sink increases the coefficient of heat conductivity, so that it has reliable stability illumination and 5 years lifespan.

NESIGNTM
Illuminating life



Features

- Ultra high efficacy, more energy saving
- Minimalist and dust-free
- Unique optical design for aisle lighting
- Intelligent control can be supported
- Emergency back-up can be optional








* Black lamp body, orange end cover is optional, minimum order quantity is 200pcs.

Specifications





| Model No. | HBL-90W- | HBL-120W- | HBL-150W- | HBL-180W- | HBL-210W- | HBL-240W- | HBL-300W- | HBL-360W- | HBL-420W- | HBL-480W- |
|--------------------------------|---|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|
| Rated Wattage | 90W | 120W | 150W | 180W | 210W | 240W | 300W | 360W | 420W | 480W |
| Luminous Flux | 13,500lm | 18,000lm | 22,500lm | 27,000lm | 31,500lm | 36,000lm | 45,000lm | 54,000lm | 63,000lm | 72,000lm |
| Rated Voltage | AC 100-277V, 50/60Hz | | | | | | | | | |
| Beam Angle | 70°/30°x70°/30°x100°/40°x80°/55°x130° | | | | | | | | | |
| Power Factor | >0.95 | | | | | | | | | |
| Efficacy | 150lm/W | | | | | | | | | |
| CCT | 5000K(2700K/3000K/4000K/5700K Optional) | | | | | | | | | |
| CRI | 75Ra (≥85Ra Optional) | | | | | | | | | |
| Warranty | 5 years | | | | | | | | | |
| Intelligent Control Extensions | | | | | | | | | | |

*Specifications subject to change without notice

Distribution

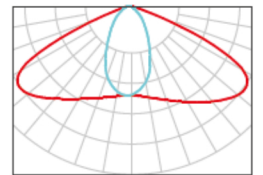

Optional Accessories

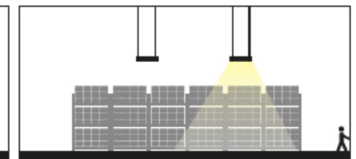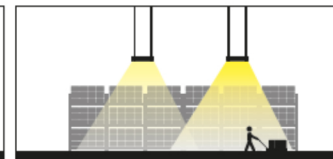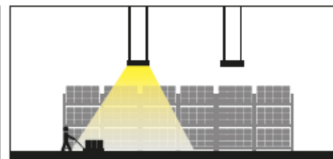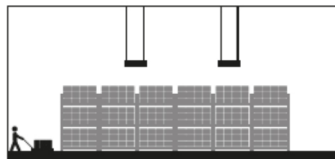

| | |
|------------------------|--|
| Hold time | 5s / 30s / 90s / 3min / 20min / 30min |
| Daylight sensor | 50lux / 100lux / 200lux / Disable |
| Stand-by period | 5s / 5min / 10min / 30min / 1h / Disable |
| Stand-by dimming level | level 10% / 20% / 30% / 50% |
| Mounting height | 15m Max |



Tel : +46 (0)8 754 70 40

E-mail : order@nelco.se

Web : www.nelco.se