

Universal alarm bell UW1+2

Comax
Signaltechnik


General information

With its simple look and its powerful sound, the universal alarm bell UW is designed for signalling and calling purposes. Thanks to its rugged construction, ringing sound and specific voltage, this device is ideally suited for use in clock installations.



Technical data

| | |
|----------------------|--|
| Case | ABS, shock-resistant |
| Colour | grey |
| Bell dome | steel, Ø 150 mm |
| Colour | grey |
| System of protection | IP32 according to EN 60529 IP54 according to EN60529 (with bottom cover, optional) |
| Duty cycle | continuous operation |
| Mounting direction | unlimited |
| Temperature range | -25°C to +60 °C |
| Cable lead | surface, 4x70 mm screws |
| Weight | approx. 1.1 kg |

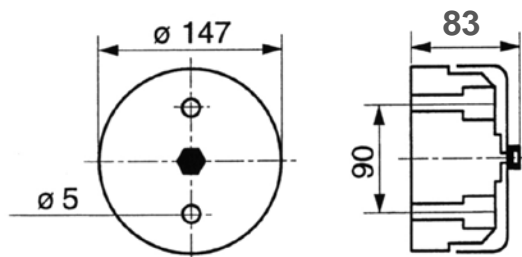

Order data

| Item number | Rated voltage | Sound intensity level | Current consumption |
|-------------|---------------|-----------------------|---------------------|
| UW1.024.1* | 24 VAC | approx. 105 dB(A), 1m | 0.40 A |
| UW1.048.1* | 48 VAC | approx. 105 dB(A), 1m | 0.20 A |
| UW1.060.1* | 60 VAC | approx. 105 dB(A), 1m | 0.15 A |
| UW1.120.4* | 120 VAC 60 Hz | approx. 105 dB(A), 1m | 0.10 A |
| UW1.230.1* | 230 VAC | approx. 105 dB(A), 1m | 0.05 A |
| UW2.024.2* | 24 VDC | approx. 105 dB(A), 1m | 0.32 A |
| UW2.048.2* | 48 VDC | approx. 105 dB(A), 1m | 0.20 A |

Other voltages on request

Option

*044 With bottom cover

Subject to change without prior notice



Comax
Signaltechnik

Comax Industrielle Signaltechnik AG, Thalstrasse 279, CH-4712 Laupersdorf/Schweiz
Tel +41 32 617 31 41 E- mail@comax.ch Internet www.comax.ch